

FEATURES

- Solenoid valve with adjustable electronic timer, integrated manual shut-off and filter
- The electronic timer is particularly designed for automatic control of condensate draining periods at regular, adjustable intervals

GENERAL

Differential pressure
Ambient temperature
Max. viscosity
Response time
Electronic timer


See "Specifications" [1 bar = 100 kPa]

-10°C to +50°C

40 cSt (mm²/s)

8 - 20 ms

Converts a continuous power input into a succession of ON and OFF periods

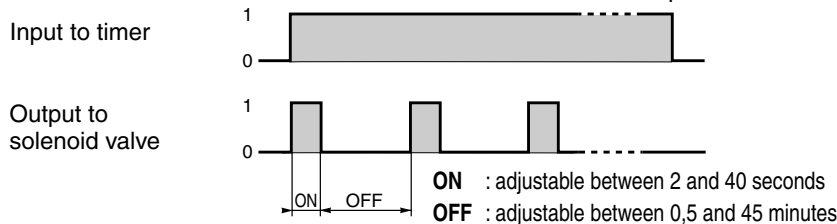

fluids (*)	temperature range (TS)	seals (*)
air, inert gas, water, oil	- 25°C to + 80°C	NBR (nitrile) FPM (fluoroelastomer)

MATERIALS IN CONTACT WITH FLUID

(*) Ensure that the compatibility of the fluids in contact with the materials is verified

	Solenoid valve 1/4	Drain 1/2
Body	Brass	Brass
Internal parts	Stainless steel	Brass
Spring	Stainless steel	-
Seat	Brass and stainless steel	-
Seals	FPM	NBR
Shading coil	Copper	-
Inlet filter	-	Stainless steel strainer

ELECTRICAL CHARACTERISTICS


Coil insulation class	F
Coil connection	ISO 4400 / EN 175301-803, form A (for timer catalogue no. 88122627)
Connector	Spade plug (cable Ø 6-10 mm)
Connector specification	ISO 4400 / EN 175301-803, form A
Electrical safety	IEC 335
Electrical enclosure protection	Moulded IP65 (EN 60529)
Repeatability	± 0,1%
Scale accuracy	± 10%
Standard voltages	DC (=) : 24V - 48V AC (~) : 24V - 48V - 115V - 230V / 50 Hz

power ratings				operator ambient temperature range (TS)	replacement coil		type ⁽¹⁾
inrush	holding		hot/cold		~	=	
(VA)	(VA)	(W)	(W)	(C°)	230 V/50 Hz	24 V DC	
55	23	10,5	9 / 11,2	-10 to + 50	400425-117	400425-142	01

⁽¹⁾ Refer to the dimensional drawings on the following page.

SPECIFICATIONS

pipe size	orifice size	flow coefficient Kv		operating pressure differential (bar)				power coil (W)		catalogue number of assembly consisting of solenoid valve, electronic timer and drain	
				min.	max. (PS)						
					air (*)	water/oil (*)					
	(mm)	(m³/h)	(l/min)		~	=	~	=	~	=	~/=
NC - Normally closed											
drain port: G 1/2 port 2 : (G*) 1/4	4,5	0,42	7	0	16	5	16	5	10,5	11,2	CDVAE272A019

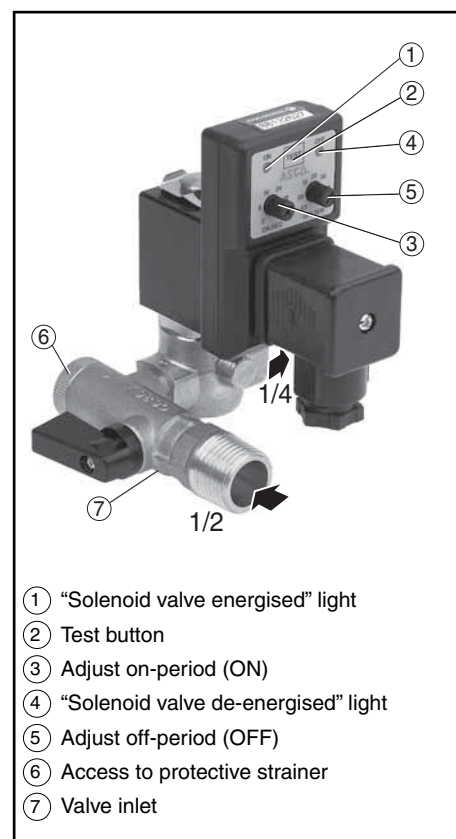

OPTIONS AND ACCESSORIES

- Other pipe threads are available on request
- Plug with visual indication and peak voltage suppression or with cable length of 2 m (see Solenoids, Coils & Accessories section)

INSTALLATION

- The assembly can be mounted in any position without affecting operation
- Solenoid valves have 2 mounting holes in body (ØM4, depth 6 mm)
- 1/4 pipe connections (G*) have standard combination thread according to ISO 228/1 and ISO 7/1. Pipe connections G 1/2 have standard thread according to ISO 228/1
- Installation/maintenance instructions are included with each assembly

SPARE PARTS KIT

catalogue number	spare parts kit no.		
	solenoid valve ~/=	drain valve G 1/2	electronic timer
CDVAE272A019	C140040	88100914	88122627

ORDERING EXAMPLES:

CDVA	E	272	A	019	230V / 50 Hz
CDVA	E	272	A	019	24V DC
prefix					
pipe thread					voltage
basic number					

ORDERING EXAMPLES KITS:

C140040
basic number



DIMENSIONS (mm), WEIGHT (kg)



TYPE 01

IEC 335 / ISO 4400

Solenoid operated drain valve assembly with electronic timer 1/4 IP65

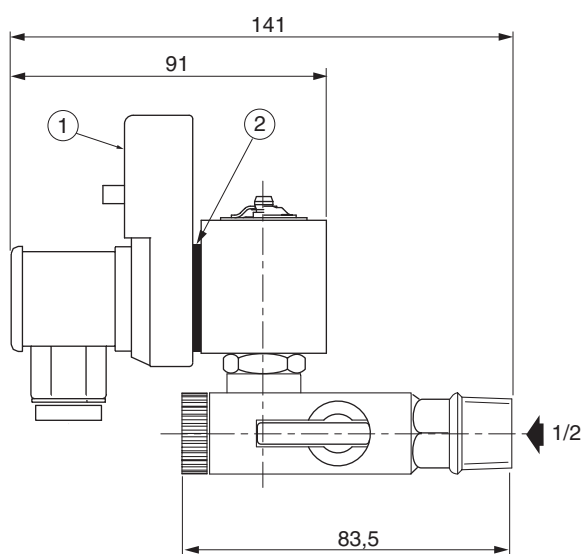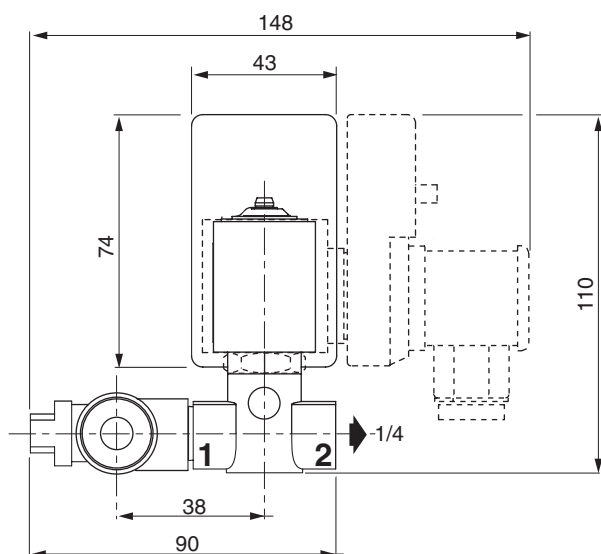

type	weight ⁽¹⁾
01	0,550

⁽¹⁾ Assembly with connector.

- ① Orientable electronic timer
- ② Seal and connection according to ISO 4400 / EN 175301-803, form A, for mounting of timer, catalogue number 88122627

FEATURES

- Drain valve 1/2 NC with solenoid pilot valve 3/2 NC and adjustable electronic timer for condensate draining applications (compressors etc.)
- The electronic timer is particularly designed for automatic control of condensate draining periods at regular, adjustable intervals
- The valve with stainless steel body is particularly suited for use with contaminated or corrosive fluids

GENERAL

Differential pressure

See "Specifications" [1 bar = 100 kPa]

Max. pressure

16 bar

Max. viscosity

600 cSt (mm²/s)

Pilot fluid

Air, water, filtered

Pilot pressure

See "Specifications"

Ambient temperature


-10°C to +50°C

Pilot fluid temperature

-10°C to +50°C

Electronic timer

Converts a continuous power input into a succession of ON and OFF periods

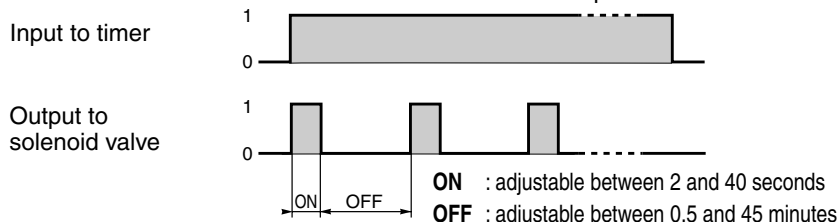

drain valve: fluids (*)	temperature range (TS)	seals (*)
air, inert gas, water, oil	- 10°C to + 140°C	PTFE

MATERIALS IN CONTACT WITH FLUID

(*) Ensure that the compatibility of the fluids in contact with the materials is verified

	Solenoid pilot 1/8	Drain valve E290 1/2
Body	Brass	AISI 316L
Stuffing box body	-	AISI 316L
Internal parts	Stainless steel	Stainless steel
Spring	Stainless steel	-
Stuffing box packing	-	PTFE chevrons
Seat	Brass and stainless steel	-
Seals	NBR	FPM, PTFE
Shading coil	Copper	-

OTHER MATERIALS

Operator - PA reinforced

ELECTRICAL CHARACTERISTICS

Coil insulation class

F

Coil connection

DIN 43650, 11mm, industry standard B (for timer catalogue no. 88122638)

Connector

Connector specification

Spade plug (cable Ø 6-10 mm)

Electrical safety

IEC 335

Electrical enclosure protection

Moulded IP65 (EN 60529)

Repeatability

± 0,1%

Scale accuracy

± 10%

Standard voltages

DC (=) : 24V - 48V


(Other voltages and 60 Hz on request)

AC (~) : 24V - 48V - 115V - 230V / 50 Hz

power ratings				operator ambient temperature range (TS)	replacement coil		type ⁽¹⁾
inrush	holding		hot/cold		~	=	
~	~		=				
(VA)	(VA)	(W)	(W)	(C°)	230 V/50 Hz	24 V DC	
12	6	4	4.5 / 5.5	-10 to + 50	43005429	43005413	01

SPECIFICATIONS

pipe size	DN	flow coefficient Kv		pilot pressure (bar)		operating pressure differential (bar)			operator dia.	catalogue number of assembly consisting of drain valve, solenoid pilot valve and electronic timer
						min.	max. (PS)			
							(G*)	(mm)	(m³/h)	
NC - Normally closed, fluid entry under the disc										
drain valve: 1/2	15	4,1	68	4	10	0	12	12	32	CDVAE290A792

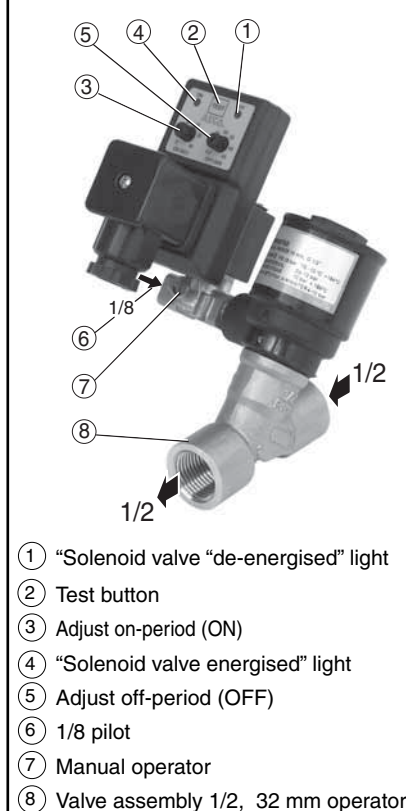

OPTIONS AND ACCESSORIES

- Other pipe threads are available on request
- Optical position indicator on dia. 32 mm operator
- Plug with visual indication and peak voltage suppression or with cable length of 2 m (see Solenoids, Coils & Accessories section)

INSTALLATION

- The assembly can be mounted in any position without affecting operation
- Compatible with ASTM oils 1, 2 and 3
- Pipe connections (G*) have standard combination thread according to ISO 228/1 and ISO 7/1
- Installation/maintenance instructions are included with each assembly

SPARE PARTS KIT

catalogue number	spare parts kit no.	
	drain valve Ø 32 mm	electronic timer
CDVAE290A792	C140101	88122638

ORDERING EXAMPLES:

CDVA	E	290	A	792	230V / 50 Hz
CDVA	E	290	A	792	24V DC
prefix					
pipe thread					
basic number					voltage

ORDERING EXAMPLES KITS:



C140101
basic number

DIMENSIONS (mm), WEIGHT (kg)



TYPE 01

32 mm operator
Fluid entry at port 2 under the disc
Pilot operated drain valve assembly with electronic timer
1/8 IP65

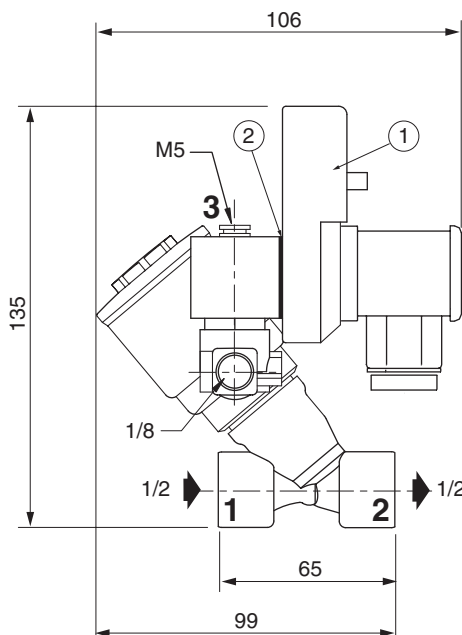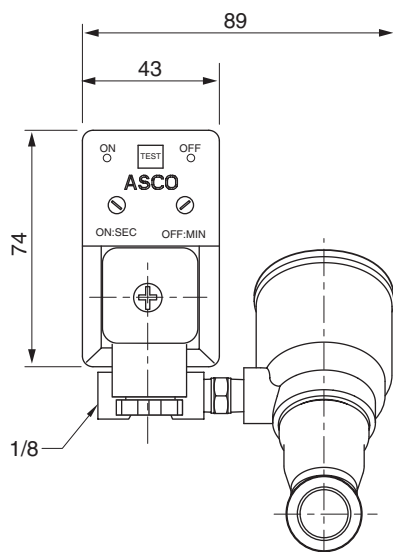

type	weight ⁽¹⁾
01	0,555

⁽¹⁾ Assembly with connector.

- ① Orientable electronic timer
- ② Seal and connection according to DIN 43650, 11 mm, industry standard B, for mounting of timer - catalogue number 88122638