

Compressed air maintenance unit, series AS2-Inch

Filling valve (soft start) AS2-SSV, 1/4 NPT - 3/8 NPT, ATEX approved

AVENTICS[®]



Technical Data

Type	Poppet valve
Operating pressure	36 ... 232 psi
Nominal flow q _n	see table
Secondary pressure	91 psi and Δp = 15 psi
Ambient temperature	-10 °C to +50 °C (14 °F to +122 °F) *
Medium	Compressed air
Weight	see table
Installation position	any

Materials (body)	Polyamide, seals Buna-N(NBR)
Threaded bushing	Die-cast zinc

Cover	ABS
-------	-----

ATEX:	In zone 1 (gas-ex, category 2G) In zone 21 (dust-ex, category 2D) In zone 2 (gas-ex, category 3G) In zone 22 (dust-ex, category 3D)
-------	--

* with dried air

Version:

Opening pressure: approx. 50% of input pressure

Actuating method: via secondary pressure

Only for closed systems

Please observe note regarding compressed air preparation!

Additional technical data: see 3/2 directional-control valve AS 2 and filling valve AS 2

Slowly builds up the pressure in pneumatic installations, i.e. prevents sudden pressure build-up after a restart following mains pressure failure or EMERGENCY OFF, thus preventing dangerous, sudden cylinder movements.




Part no.

Symbol	Threaded ports	Nominal flow q _n [CFM]	With options	Weight [lbs]	Part no.
	1/4 NPT	81	Filling adjustable	0.45	R432000676
	3/8 NPT	81	Filling adjustable	0.45	R432000677

Accessories (to be ordered separately)

	Accessory	Part no.
	Mounting plate AS2-MBR-...-W01	R432031071
	Mounting strap AS2-MBR-...-W03	R412006370
	Block assembly kit AS2-MBR-...-W04	R412006371

Flow rate characteristic

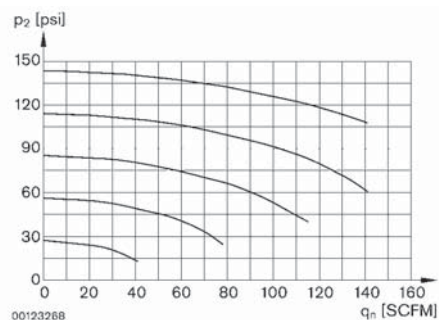

p₂ = secondary pressure
q_n = nominal flow


Pneutrol International Limited
UK Office
5 Caulside Drive, Antrim, BT41 2DU
United Kingdom
TEL: +44 (0) 289448 1808
www.valves-direct.com

sales@pneutrol.com
European Office
Unit 6, Saint Anthony's Business Park, Ballymount Road, D22 VW95
Ireland
TEL: +353 (0) 1 4373653
www.valves-direct.com

Compressed air maintenance unit, series AS2-Inch

Filling valve (soft start) AS2-SSV, 1/4 NPT - 3/8 NPT, ATEX approved

AVENTICS[®]

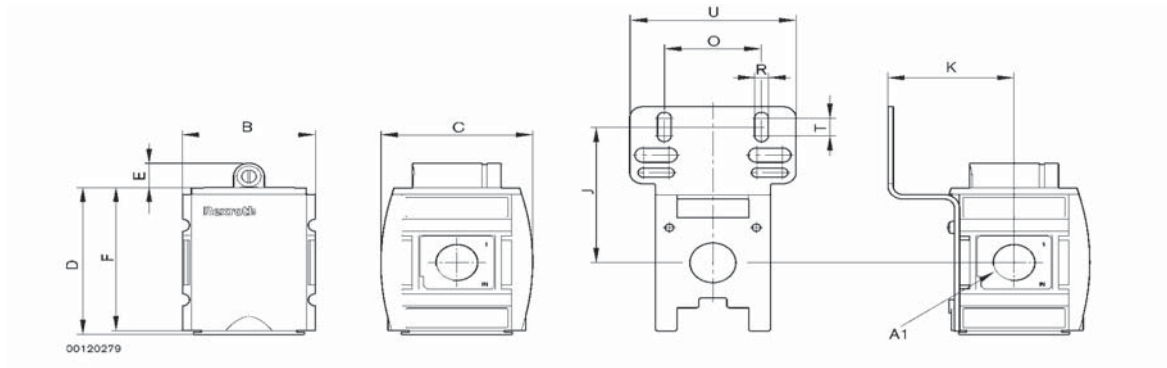

(mounting bracket not included, order separately)

A1	B	C	D	E	F	J	K	O	R	T	U
1/4 NPT	2.047	2.323	2.630	0.441	2.559	2.433	1.945	1.496	0.213	0.394	2.559
3/8 NPT	2.047	2.323	2.630	0.441	2.559	2.433	1.945	1.496	0.213	0.394	2.559

Dimensions in inches