

# Series NU2

- Elbow fitting
- External thread
- G 1/8
- plug-in with tube nut
- Ø 4
- NU2-S-RVT



Working pressure min./max.	-0,95 ... 15 bar
Ambient temperature min./max.	-25 ... 70 °C
Weight	See table

## Technical data

Part No.	Port G	Port D	Delivery unit	Weight
1823391774	G 1/8	Ø 4	10 piece	0,012 kg
1823391776	G 1/8	Ø 6	10 piece	0,026 kg
1823391775	G 1/4	Ø 4	5 piece	0,024 kg
1823391777	G 1/4	Ø 6	5 piece	0,027 kg
1823391778	G 1/4	Ø 8	5 piece	0,032 kg


## Technical information

For further information about assembling and tolerances of adaptable tubing can be found in the "Technical information" document (available in the MediaCentre).

## Technical information

Material	
Housing	Brass, nickel-plated

## Dimensions

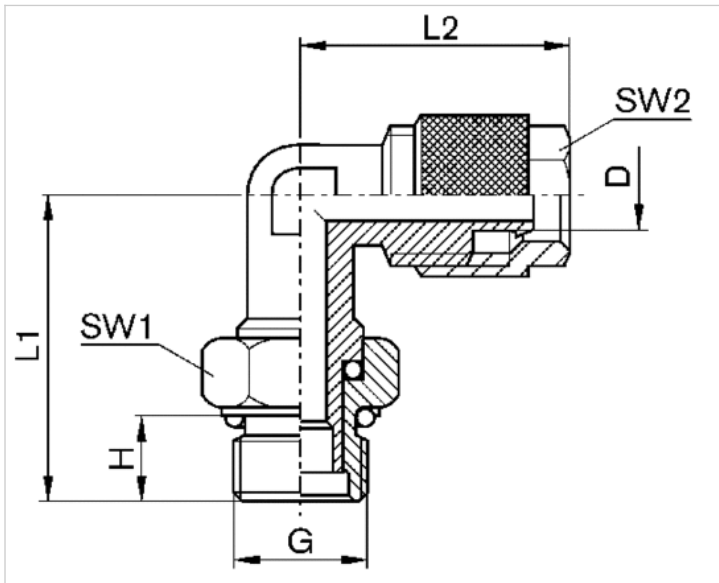

## Dimensions

Part No.	Port D	Port G	H	L1	L2	SW1	SW2
1823391774	Ø 4	G 1/8	6	22	20.6	14	10
1823391776	Ø 6	G 1/8	6	22	21.6	14	12
1823391775	Ø 4	G 1/4	8	27	24	17	10
1823391777	Ø 6	G 1/4	8	26.5	23.1	16	12
1823391778	Ø 8	G 1/4	8	27.5	24	16	14

Connection D = inside diameter of the tubing to be used