

# Series NU2

- Elbow fitting
- External thread
- R 1/8
- plug-in with tube nut
- Ø 4
- NU2-S-RVT



Working pressure min./max.	-0,95 ... 15 bar
Ambient temperature min./max.	-25 ... 70 °C
Weight	See table

## Technical data

Part No.	Port G	Port D	Delivery unit	Weight
1823391784	R 1/8	Ø 4	10 piece	0,012 kg
1823391785	R 1/8	Ø 6	5 piece	0,024 kg
1823391786	R 1/4	Ø 4	10 piece	0,026 kg
1823391787	R 1/4	Ø 6	5 piece	0,027 kg
1823391788	R 1/4	Ø 8	5 piece	0,032 kg

## Technical information


For use up to -40 °C when using with compressed air tubing series TU1-S-PAM Ø4x1, Ø6x1, Ø8x1, Ø10x1, Ø12x1.5

For further information about assembling and tolerances of adaptable tubing can be found in the "Technical information" document (available in the MediaCentre).

## Technical information

Material	
Housing	Brass, nickel-plated

## Dimensions

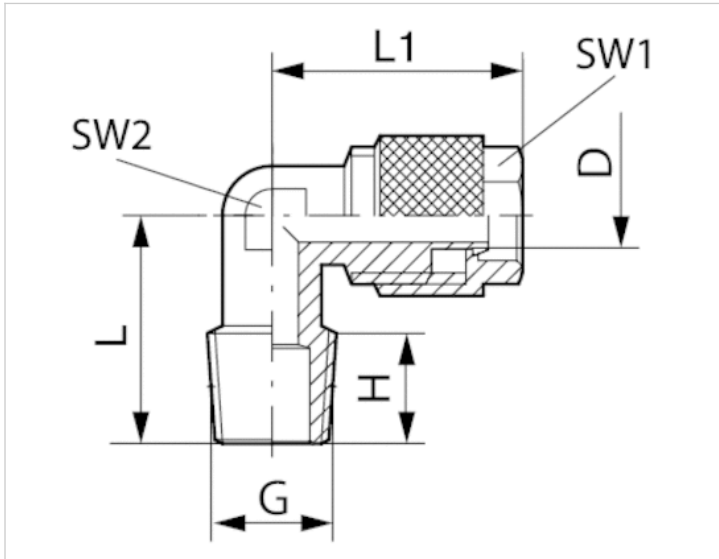

## Dimensions

Part No.	Port D	Port G	H	L	L1	SW 1	SW 2
1823391784	Ø 4	R 1/8	8.5	16.8	21	10	10
1823391785	Ø 6	R 1/8	8.5	17	20	12	10
1823391786	Ø 4	R 1/4	12.5	23	21.5	10	11
1823391787	Ø 6	R 1/4	11.8	22	22	12	11
1823391788	Ø 8	R 1/4	10.5	22	24	14	11

Connection D = inside diameter of the tubing to be used