

Series NU2

- T-union
- External thread
- R 1/8
- plug-in with tube nut
- Ø 4
- NU2-S-RTT



Working pressure min./max.	-0,95 ... 15 bar
Ambient temperature min./max.	-25 ... 70 °C
Weight	See table

Technical data

Part No.	Port G	Port D	Delivery unit	Weight
1823391789	R 1/8	Ø 4	10 piece	0,012 kg
1823391790	R 1/8	Ø 6	5 piece	0,024 kg
1823391791	R 1/4	Ø 4	10 piece	0,026 kg
1823391792	R 1/4	Ø 6	5 piece	0,027 kg
1823391793	R 1/4	Ø 8	5 piece	0,032 kg

Technical information


For use up to -40 °C when using with compressed air tubing series TU1-S-PAM Ø4x1, Ø6x1, Ø8x1, Ø10x1, Ø12x1.5

For further information about assembling and tolerances of adaptable tubing can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Housing	Brass, nickel-plated

Dimensions

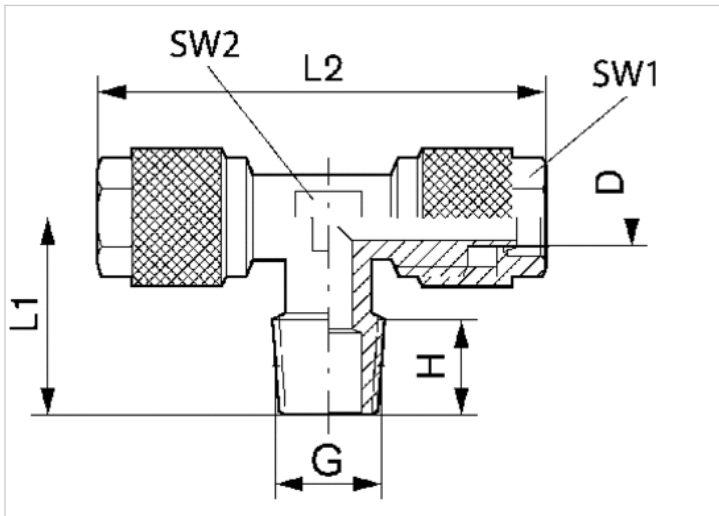

Dimensions

Part No.	Port D	Port G	H	L1	L2	SW 1	SW 2
1823391789	Ø 4	R 1/8	7.3	14.5	36	8	8
1823391790	Ø 6	R 1/8	7.3	16	37	9	9
1823391791	Ø 4	R 1/4	10.5	19	40	9	9
1823391792	Ø 6	R 1/4	11	20	40	9	9
1823391793	Ø 8	R 1/4	10.5	22	41	12	12

Connection D = inside diameter of the tubing to be used