

# Series NU2

- X-connector
- plug-in with tube nut
- Ø 3
- plug-in with tube nut
- Ø 3
- NU2-S-RXS



Working pressure min./max. -0,95 ... 15 bar  
Ambient temperature min./max. -25 ... 70 °C

## Technical data

Part No.	Port G	Port D	Delivery unit
1823391801	Ø 3	Ø 3	5 piece
1823391802	Ø 4	Ø 4	5 piece
1823391803	Ø 6	Ø 6	5 piece
1823391804	Ø 8	Ø 8	5 piece

## Technical information


For use up to -40 °C when using with compressed air tubing series TU1-S-PAM Ø4x1, Ø6x1, Ø8x1, Ø10x1, Ø12x1.5

For further information about assembling and tolerances of adaptable tubing can be found in the "Technical information" document (available in the MediaCentre).

## Technical information

Material	
Housing	Brass, nickel-plated

## Dimensions

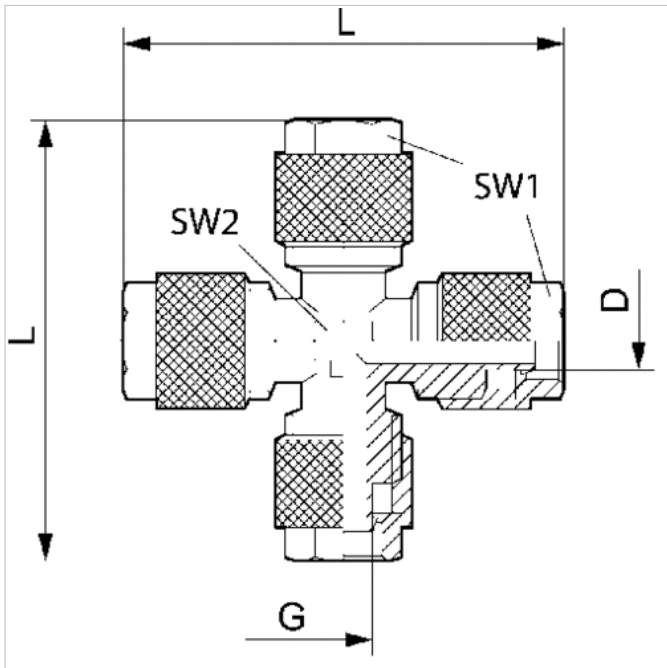

## Dimensions

Part No.	Port D	Port G	L	SW 1	SW 2
1823391801	Ø 3	Ø 3	41.2	8	8
1823391802	Ø 4	Ø 4	40	10	8
1823391803	Ø 6	Ø 6	41	12	9
1823391804	Ø 8	Ø 8	44	14	11

Connection D = inside diameter of the tubing to be used