

Adapter

- External thread
- M5 G 1/8 G 1/4 G 3/8
- Internal thread
- G 1/8 G 1/4 G 3/8 G 1/2
- FPT-S-REN



Working pressure min./max.

0 ... 16 bar

Ambient temperature min./max.

-20 ... 80 °C

Weight

See table below

Technical data

| Part No. | Port G | Port D | Delivery unit | Weight |
|------------|--------|--------|---------------|---------|
| 8633051800 | M5 | G 1/8 | 10 piece | 0,01 kg |
| 2122918140 | G 1/8 | G 1/4 | 10 piece | 0,02 kg |
| 2122914380 | G 1/4 | G 3/8 | 10 piece | 0,03 kg |
| 8633141200 | G 1/4 | G 1/2 | 10 piece | 0,04 kg |
| 2122938120 | G 3/8 | G 1/2 | 10 piece | 0,04 kg |


Weight per piece

Technical information

| Material | |
|----------|----------------------|
| Material | Brass, nickel-plated |
| Seal | Polyvinyl chloride |

Dimensions

Dimensions

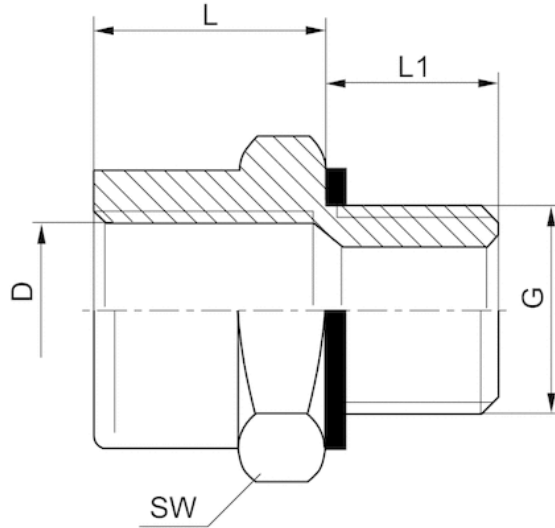

Dimensions

| Part No. | Port D | Port G | L | L1 | SW |
|------------|--------|--------|------|----|----|
| 8633051800 | G 1/8 | M5 | 14 | 4 | 14 |
| 2122918140 | G 1/4 | G 1/8 | 20 | 6 | 17 |
| 2122914380 | G 3/8 | G 1/4 | 22.5 | 8 | 22 |
| 8633141200 | G 1/2 | G 1/4 | 26 | 8 | 26 |
| 2122938120 | G 1/2 | G 3/8 | 27 | 9 | 26 |