

# Elbow fitting, tapered

- External thread
- R 1/8
- FPT-S-RVK



Working pressure min./max.

0 ... 16 bar

Ambient temperature min./max.

-20 ... 80 °C

## Technical data

Part No.	Type	Port G	Delivery unit
1823391733	FPT-S-RVK	R 1/8	10 piece
1823391734	FPT-S-RVK	R 1/4	10 piece
1823391735	FPT-S-RVK	R 3/8	5 piece
1823391736	FPT-S-RVK	R 1/2	5 piece
1823391737	FPT-S-RVK	R 3/4	2 piece
1823391738	-	R 1	2 piece

## Technical information


Material

Material

Brass, nickel-plated

## Dimensions

### Dimensions

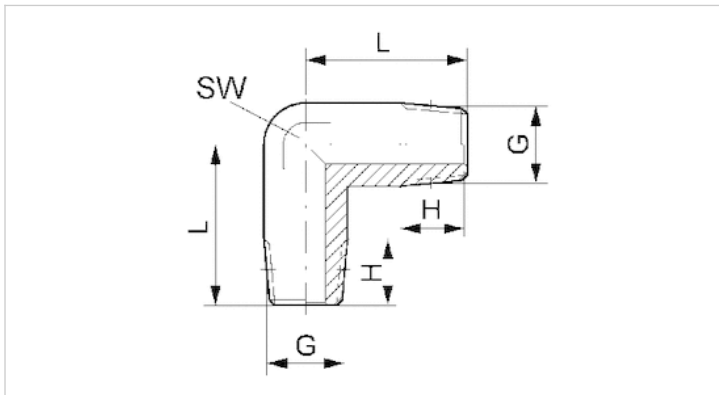

## Dimensions

Part No.	Port G	H	L	SW
1823391733	R 1/8	8,0	19,0	10
1823391734	R 1/4	11,0	24,0	13
1823391735	R 3/8	11.5	26.5	17
1823391736	R 1/2	15,0	30,0	21
1823391737	R 3/4	14.5	32,0	25
1823391738	R 1	16.8	39,0	30