UK Office
5 Caulside Drive
Antrim
BT41 2DU
United Kingdom
+44 (0) 28 9448 1808

European Office
Unit 6, Saint Anthony's Business Park
Dublin
D22 VW95
Ireland
+353 (0) 1 4373653

4/2-directional valve, Series 563 018

- Qn = 300 l/min
- Compressed air connection output G 1/8
- single solenoid
- Pipe connection

Version	Poppet valve
Activation	Mechanical
Lock type	not lockable
Actuating element	Hand lever, with detent
Switching principle	4/2
Sealing principle	Soft sealing
Nominal flow Qn	300 l/min
Working pressure min./max.	0 ... 10 bar
Ambient temperature min./max.	-25 ... 80 °C
Medium temperature min./max.	-25 ... 80 °C
Medium	Compressed air
Max. particle size	50 µm
Oil content of compressed air	0 ... 5 mg/m³
Weight	0,24 kg

Technical data

Part No.	Compressed air connection	Compressed air connection
	Input	Output
5630180100	G 1/8	G 1/8

Part No.	Compressed air connection
	Exhaust
5630180100	G 1/8

Technical information

Material	
Housing	Die cast zinc
Seals	Acrylonitrile butadiene rubber
Actuating element	Polyarylamide

UK Office
5 Caulside Drive
Antrim
BT41 2DU
United Kingdom
+44 (0) 28 9448 1808

European Office
Unit 6, Saint Anthony's Business Park
Dublin
D22 VW95
Ireland
+353 (0) 1 4373653

Dimensions

Dimensions

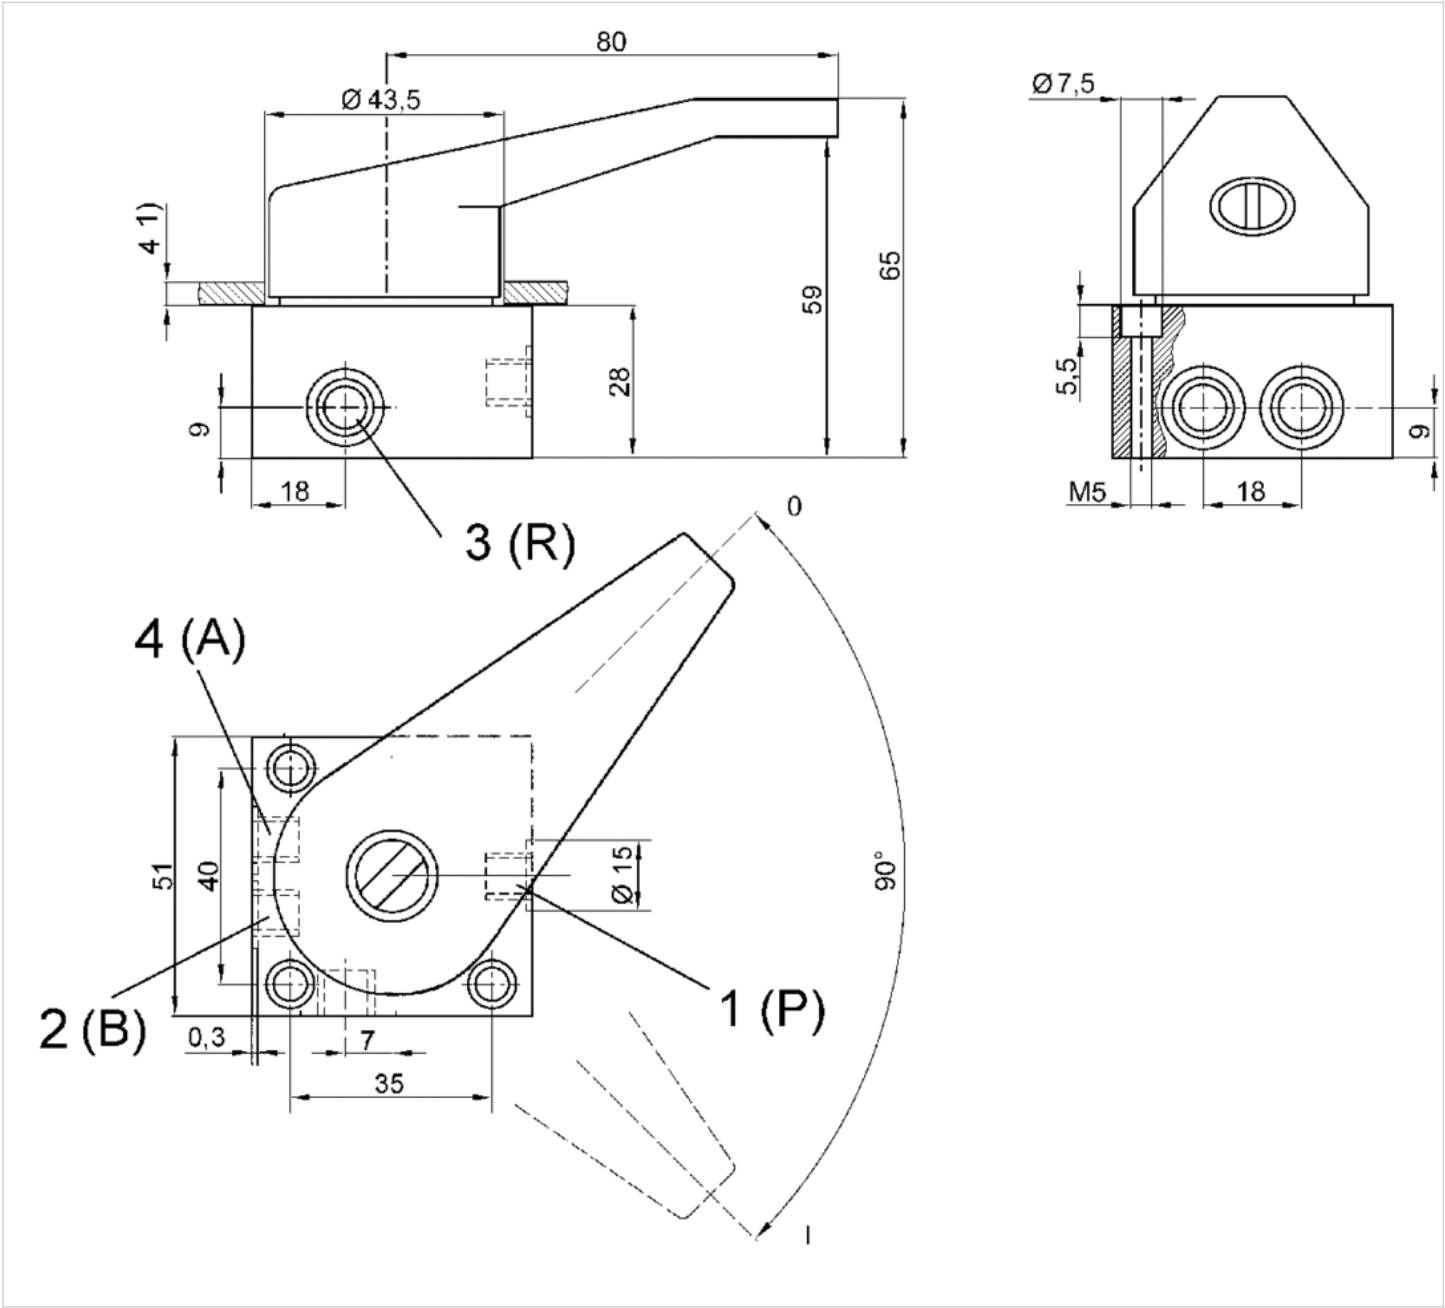

1) Max.
Pos. 0: port 1 ▸ port 4; port 2 ▸ port 3pos. I: port 1 ▸ port 2; port 4 ▸ port 3