

5/2-directional valve, Series 581, size 3

- Qn = 4800 l/min
- Plate connection
- Compressed air connection output Base plate ISO 5599-1
- Can be assembled into blocks
- Manual override with detent
- suitable for ATEX



Version	Spool valve
Blocking principle	Single base plate principle
Sealing principle	Soft sealing
ATEX class G	2G Ex mb II T4
ATEX class D	2D Ex tD A21 T130°C
Connection type	Plate connection
Standards	ISO 5599-1, ISO 3
Nominal flow Qn	4800 l/min
Compressed air connection	Base plate ISO 5599-1
Working pressure min./max.	-0,95 ... 16 bar
Control pressure min./max.	1,5 ... 16 bar
Ambient temperature min./max.	-20 ... 70 °C
Medium temperature min./max.	-20 ... 70 °C
Medium	Compressed air class 6-4-3
Max. particle size	50 µm
Oil content of compressed air	0 ... 5 mg/m ³
Mounting screw	with hexagon socket
Mounting screw tightening torque	10 Nm
Weight	0,85 kg

Technical data

Part No.		Flow conductance	Throttle	ATEX	Fig.	
		C-value				
5813330000		18,9 l/(s*bar)	-	suitable for ATEX	-	-
5813340000		18,9 l/(s*bar)	-	suitable for ATEX	Fig. 1	1)
5813331000		18,9 l/(s*bar)	with throttle	suitable for ATEX	-	-
5813341000		18,9 l/(s*bar)	with throttle	suitable for ATEX	Fig. 1	1)

Nominal flow Qn at 6 bar and $\Delta p = 1$ bar

1) Valve cover with two connection locations for mounting series 551 logic modules.

Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.


Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Housing	Aluminum
Seals	Acrylonitrile butadiene rubber

Dimensions

Dimensions

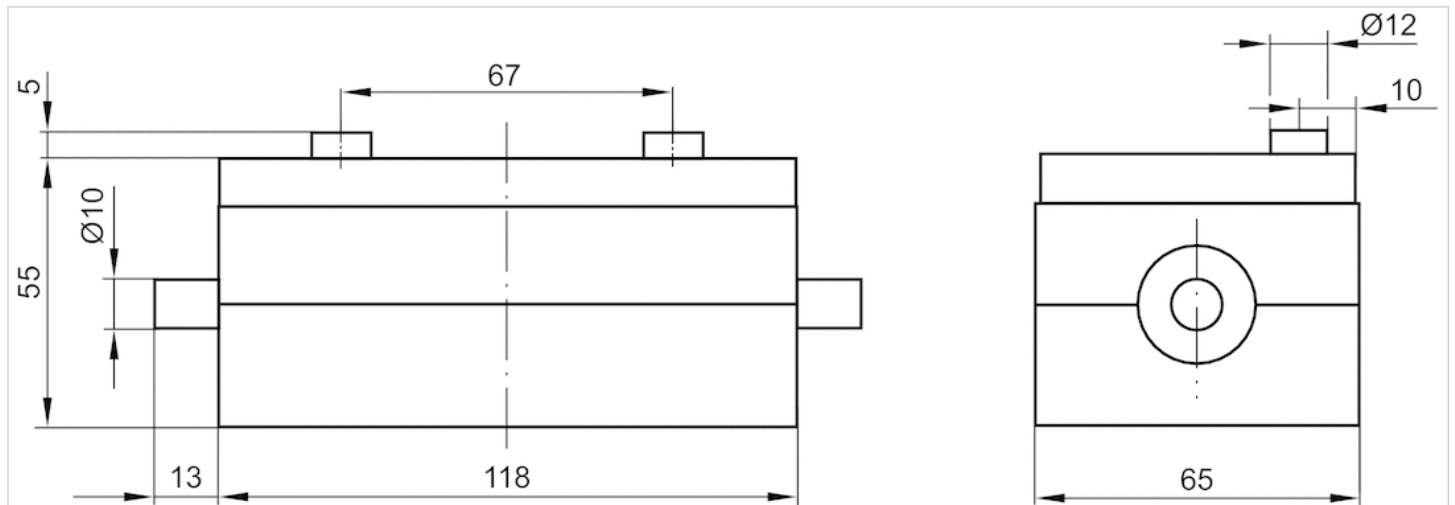

With manual override

Fig. 1 Hole pattern for logic modules

