

Round plug connector, Series CON-RD

- Plug, M12x1, 4-pin, D-coded, straight, 180°
- for Ethernet, EtherNET/IP, EtherCAT, POWERLINK, sercos III
- shielded



Connection type	Thread cutting
Ambient temperature min./max.	-40 ... 85 °C
Operational voltage	48 V AC/DC
Protection class	IP67
Weight	0,41 kg

Technical data

Part No.	Max. current	suitable cable-Ø min./max
R419801401	4 A	6 mm

Technical information


The specified protection class is only valid in assembled and tested state.

Technical information

Material	
Housing	Brass, nickel-plated

Dimensions

Dimensions

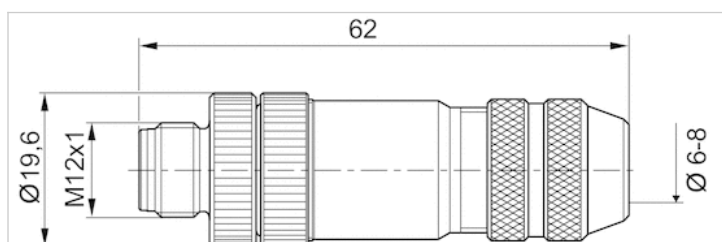

Pin assignments

Plug pin assignment

