

# T-connector



Weight

See table below

## Technical data


Part No.	Clearance (LW)	Clearance LW2	Delivery unit	Weight
1823381015	3 mm	3 mm	25 piece	0,001 kg
1823381004	4 mm	4 mm	25 piece	0,002 kg
1823381009	4 mm	6 mm	25 piece	0,002 kg
1823381012	6 mm	4 mm	25 piece	0,003 kg
1823381007	6 mm	6 mm	25 piece	0,003 kg
1823381013	8 mm	4 mm	25 piece	0,004 kg
1823381014	8 mm	6 mm	25 piece	0,004 kg
1823381010	8 mm	8 mm	25 piece	0,006 kg
1823381006	8 mm	13 mm	10 piece	0,007 kg
1823381032	10 mm	6 mm	10 piece	0,005 kg
1823381033	10 mm	8 mm	10 piece	0,006 kg
1823381034	10 mm	10 mm	10 piece	0,006 kg
1823381005	13 mm	8 mm	10 piece	0,011 kg
1823381035	13 mm	10 mm	10 piece	0,008 kg
1823381011	13 mm	13 mm	10 piece	0,012 kg
1823381008	19 mm	19 mm	10 piece	0,021 kg

LW = inside diameter of the tubing to be used

## Technical information

Material	
Material	Polyoxymethylene

## Dimensions

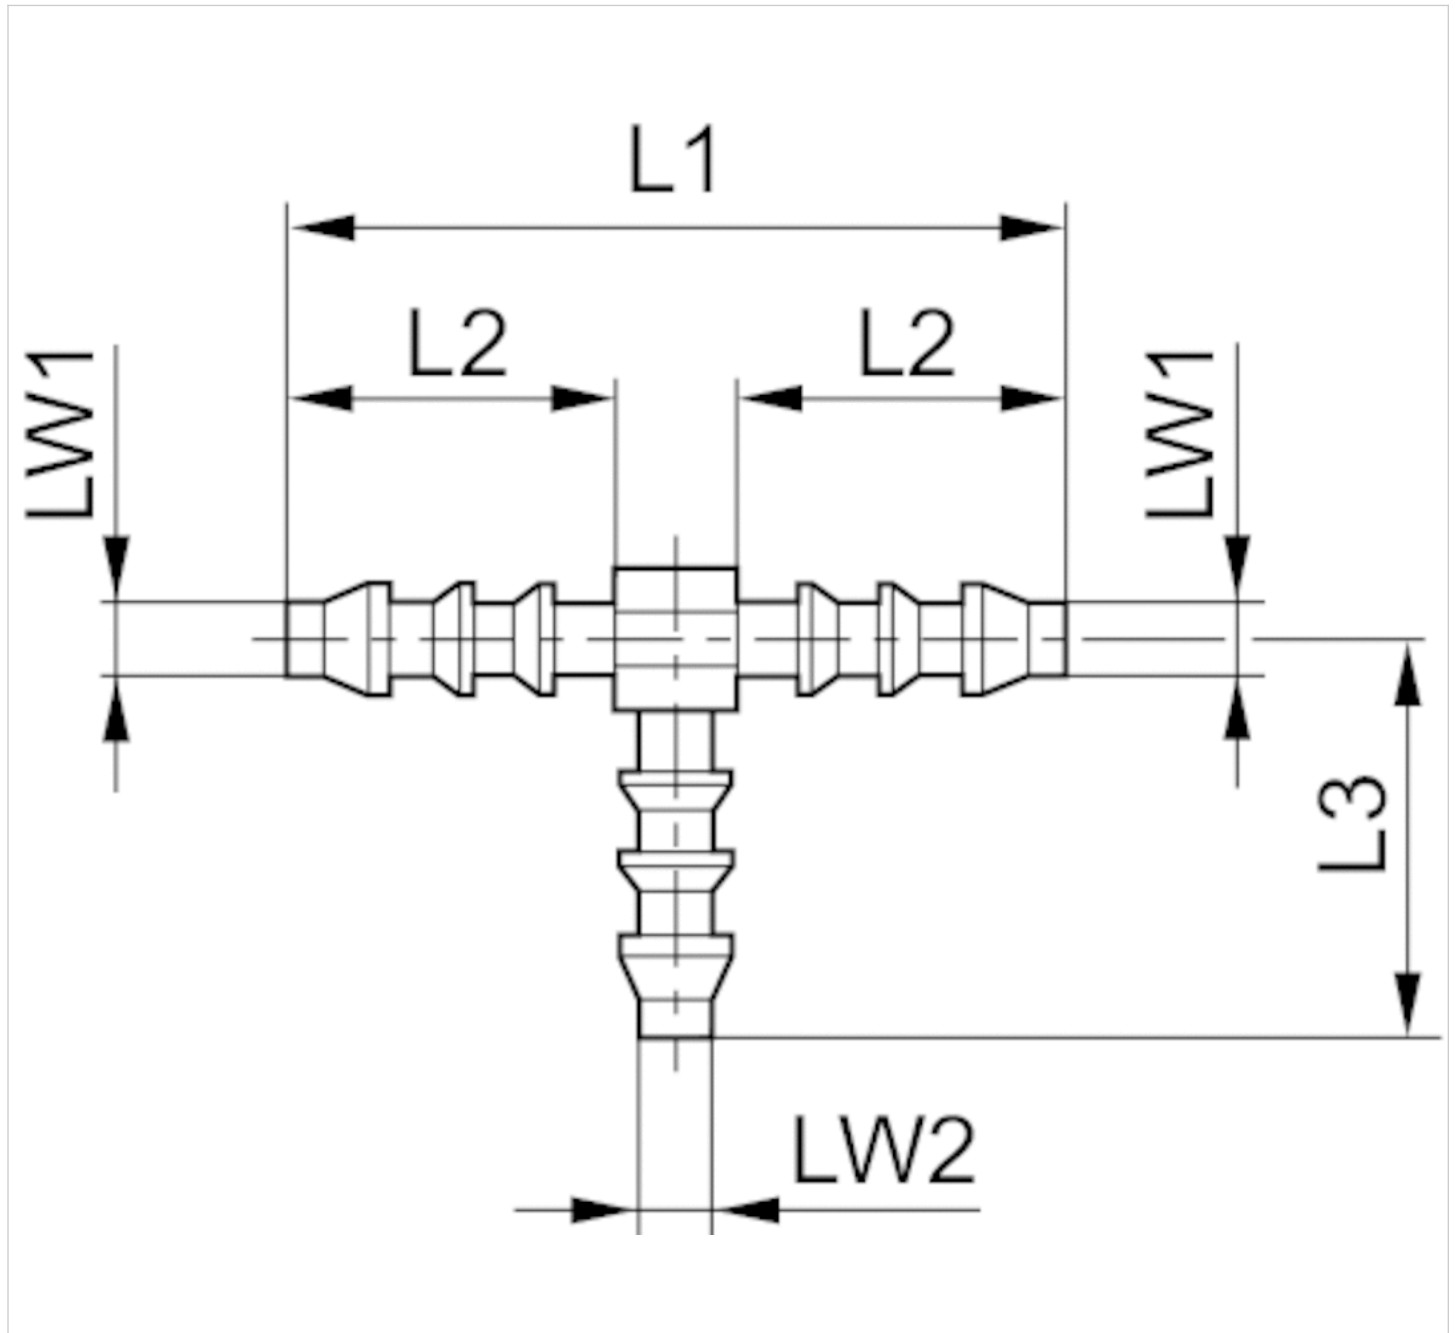

## Dimensions

Part No.	LW	LW2	L1	L2	L3
1823381015	3 mm	3 mm	25	10	13
1823381004	4 mm	4 mm	35	14.5	20
1823381009	4 mm	6 mm	35	14.5	24
1823381012	6 mm	4 mm	49	20.5	21
1823381007	6 mm	6 mm	50	20.5	26
1823381013	8 mm	4 mm	56	23	22
1823381014	8 mm	6 mm	56	23	28
1823381010	8 mm	8 mm	58	-	30

UK Office  
 5 Caulside Drive  
 Antrim  
 BT41 2DU  
 United Kingdom  
 +44 (0) 28 9448 1808

European Office  
 Unit 6, Saint Anthony's Business Park  
 Dublin  
 D22 VW95  
 Ireland  
 +353 (0) 1 4373653



Part No.	LW	LW2	L1	L2	L3
1823381006	8 mm	13 mm	58	22.5	36
1823381032	10 mm	6 mm	62	25	31
1823381033	10 mm	8 mm	62	25.5	31
1823381034	10 mm	10 mm	62	25	33
1823381005	13 mm	8 mm	70	-	34
1823381035	13 mm	10 mm	70	-	36
1823381011	13 mm	13 mm	73	-	39
1823381008	19 mm	19 mm	87	-	46

UK Office  
5 Caulside Drive  
Antrim  
BT41 2DU  
United Kingdom  
+44 (0) 28 9448 1808

European Office  
Unit 6, Saint Anthony's Business Park  
Dublin  
D22 VW95  
Ireland  
+353 (0) 1 4373653

## Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR\\_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.  
2020-12



**CONSIDER IT SOLVED™**