


Coil, series CO1

- Form C, coil kit
- Coil width 15 mm
- Power consumption DC 2 W
- Holding power AC 1.6 VA
- Switch-on power AC 2.2 VA



Connector standard	ISO 15217
electrical connections	Plug, 3-pin
Ambient temperature min./max.	-10 ... 50 °C
Protection class With valve plug connector/plug	IP65
Duty cycle ED	100 %
Weight	See table below

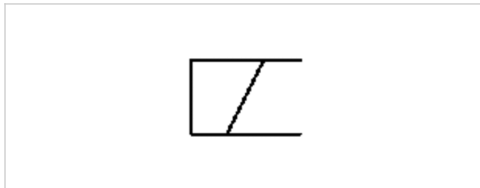

Technical data

Part No.	Operationalvoltage	Operationalvoltage	Operationalvoltage	Voltage tolerance
	DC	AC 50 Hz	AC 60 Hz	DC
R422101598	-	110 V	110 V	-
R422101599	-	230 V	230 V	-
R422101600	24 V	-	-	-10% / +10%
R422101601	-	24 V	24 V	-
R422101602	12 V	-	-	-10% / +10%

Part No.	Voltage tolerance	Voltage tolerance	Power consumption	Holding power
	AC 50 Hz	AC 60 Hz	DC	AC 50 Hz
R422101598	-10% / +10%	-10% / +10%	-	1,6 VA
R422101599	-10% / +10%	-10% / +10%	-	1,6 VA
R422101600	-	-	2 W	-
R422101601	-10% / +10%	-10% / +10%	-	1,6 VA
R422101602	-	-	2 W	-

Part No.	Holding power	Switch-on power	Switch-on power	Weight	
	AC 60 Hz	AC 50 Hz	AC 60 Hz		
R422101598	1,4 VA	2,2 VA	2 VA	0,023 kg	1)
R422101599	1,4 VA	2,2 VA	2 VA	0,022 kg	1)
R422101600	-	-	-	0,024 kg	-
R422101601	1,4 VA	2,2 VA	2 VA	0,023 kg	1)



Part No.	Holding power	Switch-on power	Switch-on power	Weight	
	AC 60 Hz	AC 50 Hz	AC 60 Hz		
R422101602	-	-	-	0,024 kg	-

1) Can only be combined with TC series base valves and TC series valves with alternating voltage (AC).

Technical information

Please note that the coils are only compatible with TC series valves that were produced starting in 2011.

Technical information

Material	
Housing	Polyamide

Dimensions

Dimensions

