UK Office
5 Caulside Drive
Antrim
BT41 2DU
United Kingdom
+44 (0) 28 9448 1808

European Office
Unit 6, Saint Anthony's Business Park
Dublin
D22 VW95
Ireland
+353 (0) 1 4373653

Check-choke valve, Series CC04

- Qn 1▸2 = 360 l/min
- direction of throttle 1 ▸ 2
- inlet-side throttling
- push-in fitting / pin bushing

Working pressure min./max.	0,5 ... 10 bar
Ambient temperature min./max.	-10 ... 70 °C
Medium temperature min./max.	-10 ... 70 °C
Medium	Compressed air

Technical data

Part No.	Port 1	Port 2	Throttle bore	Flow
			Ø	Qn 1▸2
R412007405	Ø 8	Ø 8	3,5 mm	360 l/min

Technical information

Material	
Housing	Polyamide
Flow control screw	Brass
Seals	Acrylonitrile butadiene rubber

UK Office
5 Caulside Drive
Antrim
BT41 2DU
United Kingdom
+44 (0) 28 9448 1808

European Office
Unit 6, Saint Anthony's Business Park
Dublin
D22 VW95
Ireland
+353 (0) 1 4373653

Dimensions

Dimensions

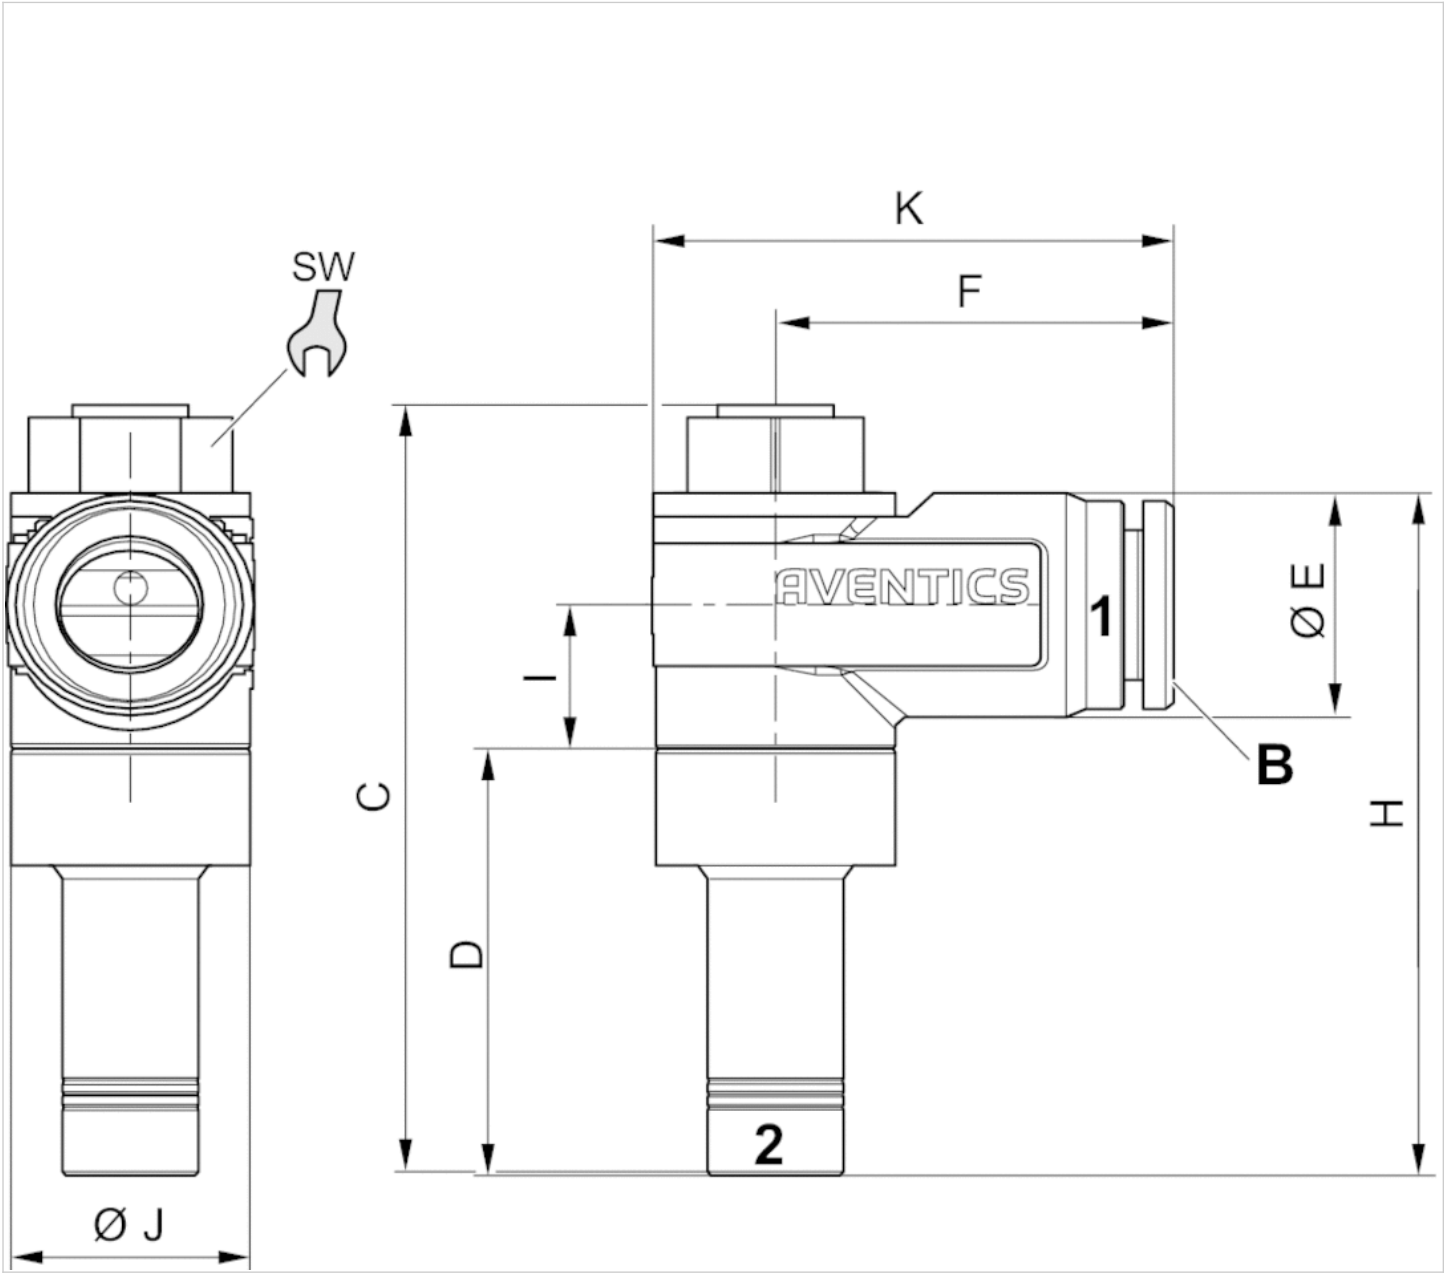

Dimensions

Part No.	Port 1	Port 2	C	D	ØE	F	H	I	ØJ	K	SW
R412007405	Ø 8	Ø 8	52,9	29,7	13,5	24,2	47,2	9,8	13,6	31,1	10