

# Blanking plate

- standard ISO 5599-1
- Frame size ISO 3



Standards	ISO 5599-1
Working pressure min./max.	-0,9 ... 16 bar
Ambient temperature min./max.	0 ... 80 °C
Medium temperature min./max.	0 ... 80 °C
Medium	Compressed air
Mounting screw	with hexagon socket
Weight	0,421 kg

## Technical data

Part No.	Type
1825503174	Blanking plate

Scope of delivery incl. seal and mounting screws


## Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!  
 The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .  
 The oil content of compressed air must remain constant during the life cycle.  
 Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

## Technical information

Material	
Base plate	Die-cast aluminum
Seal	Acrylonitrile butadiene rubber

## Dimensions

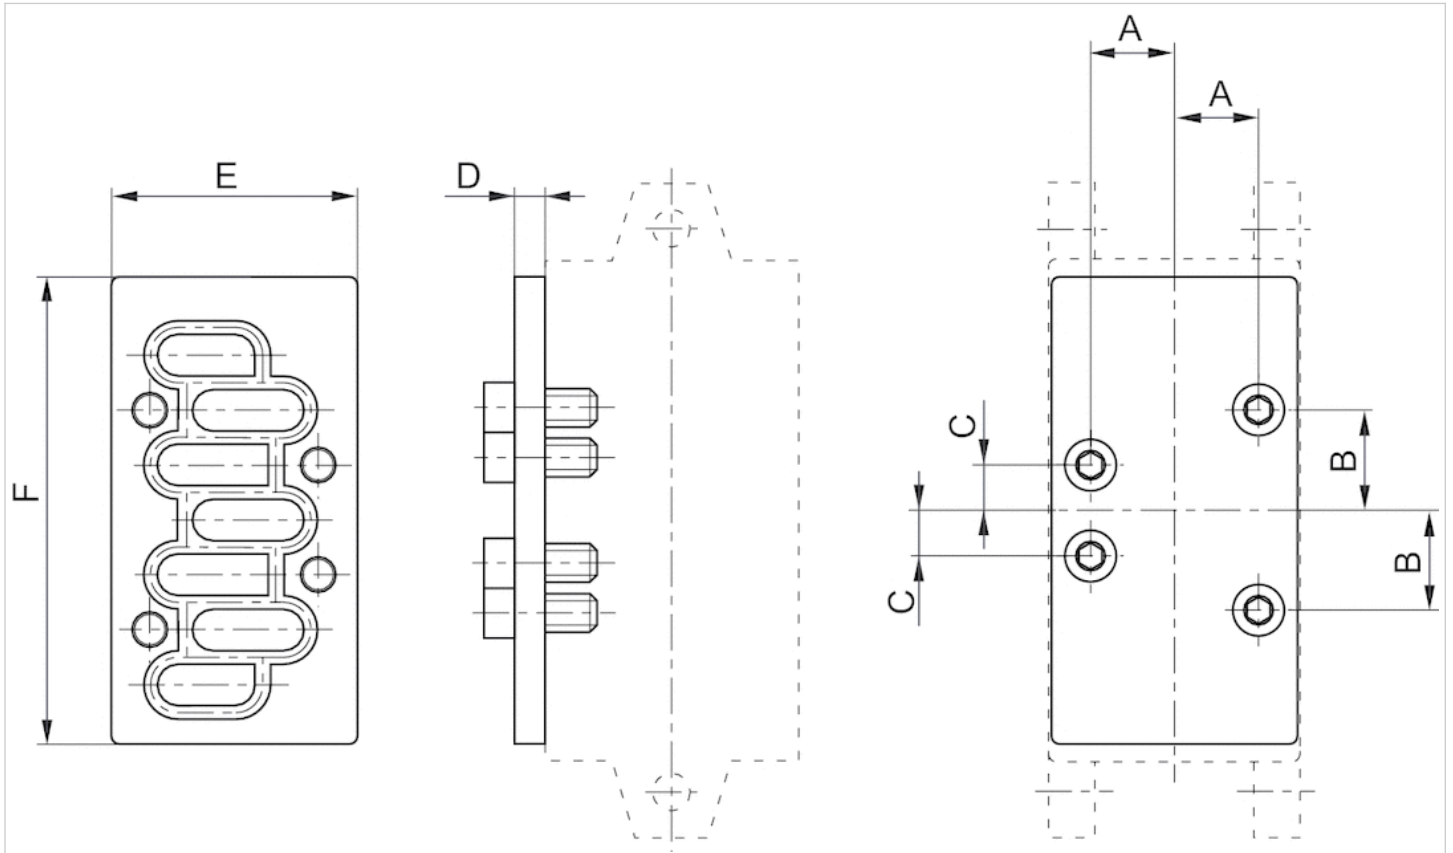

## Dimensions

Part No.	Frame size	A	B	C	D	E	F
1825503174	ISO 3	24	32	16	15	70	140