UK Office
5 Caulside Drive
Antrim
BT41 2DU
United Kingdom
+44 (0) 28 9448 1808

European Office
Unit 6, Saint Anthony's Business Park
Dublin
D22 VW95
Ireland
+353 (0) 1 4373653

# Blanking plate

- standard ISO 5599-1

| | |
|---|---|
| Standards | ISO 5599-1 |
| Working pressure min./max. | -0,9 ... 16 bar |
| Ambient temperature min./max. | 0 ... 80 °C |
| Medium temperature min./max. | 0 ... 80 °C |
| Medium | Compressed air |
| Mounting screw | with hexagon socket |
| Weight | See table |

## Technical data

| Part No. | Type | Frame size | Weight |
|---|---|---|---|
| 1825503282 | Blanking plate | ISO 1 | 0,072 kg |
| 1821015028 | Gasket ISO 1 | - | - |

## Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!
The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .
The oil content of compressed air must remain constant during the life cycle.
Use only the approved oils from AVENTICS. Further information can be found in the “Technical information” document (available in the MediaCentre).

## Technical information

| Material | |
|---|---|
| Base plate | Die-cast aluminum |
| Seal | Acrylonitrile butadiene rubber |

UK Office
5 Caulside Drive
Antrim
BT41 2DU
United Kingdom
+44 (0) 28 9448 1808

European Office
Unit 6, Saint Anthony's Business Park
Dublin
D22 VW95
Ireland
+353 (0) 1 4373653

## Dimensions

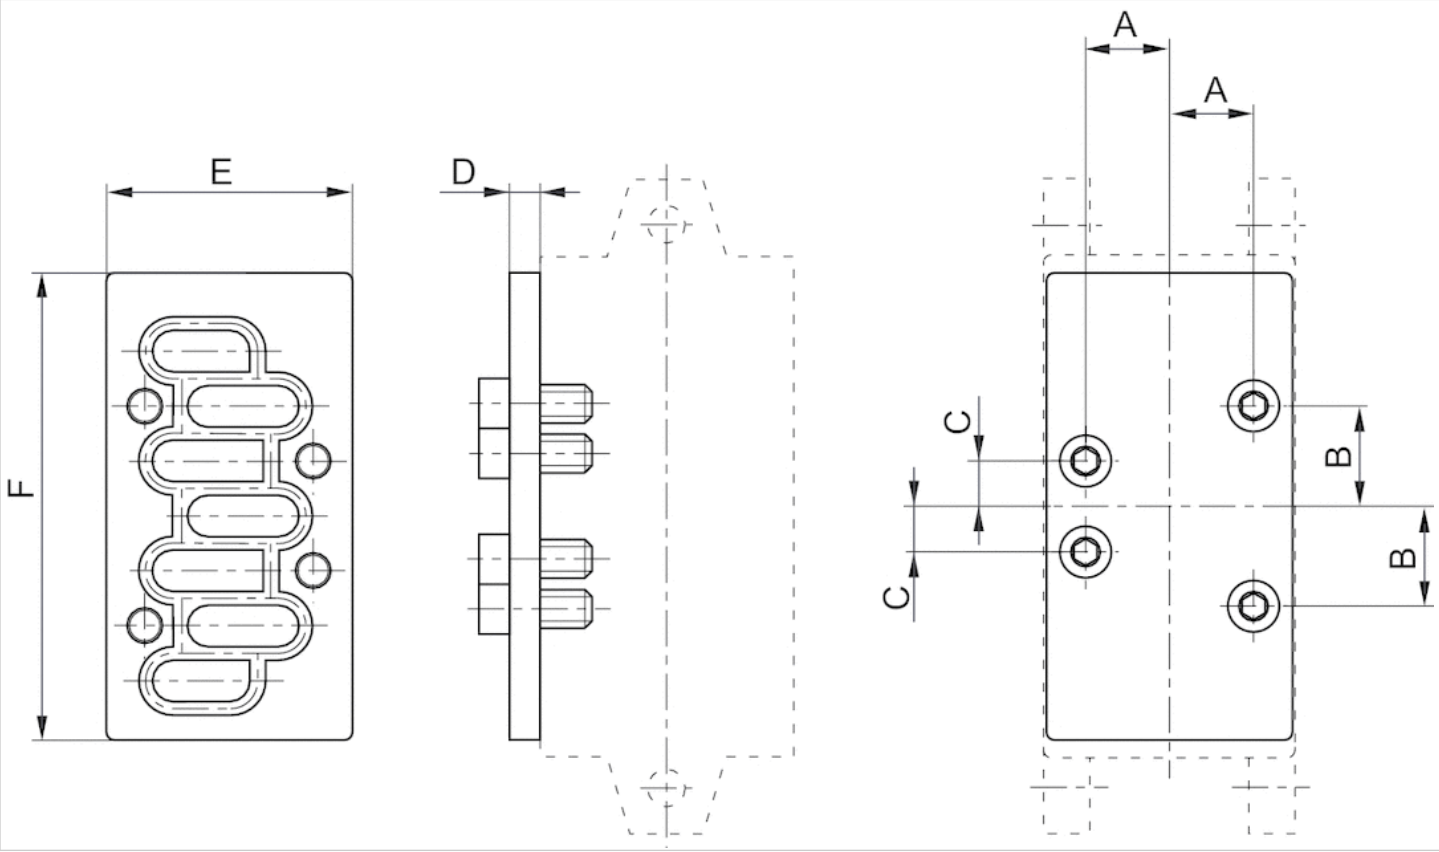


## Dimensions

| Part No. | Frame size | A | B | C | D | E | F |
|---|---|---|---|---|---|---|---|
| 1825503282 | ISO 1 | 14 | 18 | 9 | 7 | 42 | 80 |