


# Coil, series CO1

- With valve plug connector
- Coil width 30 mm
- Power consumption DC 2.1 W
- Holding power AC 4-4.1 VA
- Switch-on power AC 4-4.1 VA
- ATEX

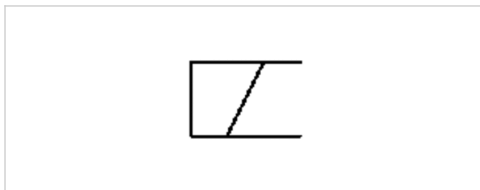

Certificates	ATEX
ATEX class G	II 3G Ex nA IIC T4 Gc X
ATEX class D	II 3D Ex tc IIIC T125°C Dc X
Ambient temperature min./max.	-10 ... 50 °C
Protection class	IP65
Duty cycle ED	100 %
Compatibility index	13
Weight	See table below

## Technical data

Part No.	Operationalvoltage	Operationalvoltage	Operationalvoltage	Voltage tolerance
	DC	AC 50 Hz	AC 60 Hz	DC
R412000144	24 V	-	-	-10% / +10%
R412000145	-	24 V	24 V	-
R412000146	-	110 V	110 V	-
R412000147	-	230 V	230 V	-

Part No.	Voltage tolerance	Voltage tolerance	Power consumption	Holding power
	AC 50 Hz	AC 60 Hz	DC	AC 50 Hz
R412000144	-	-	2,1 W	-
R412000145	-20% / +10%	-10% / +20%	-	4 VA
R412000146	-20% / +10%	-10% / +20%	-	4 VA
R412000147	-20% / +10%	-10% / +20%	-	4,1 VA

Part No.	Switch-on power	Weight
	AC 50 Hz	
R412000144	-	0,14 kg
R412000145	4 VA	0,134 kg
R412000146	4 VA	0,122 kg
R412000147	4,1 VA	0,137 kg

## Dimensions

### Dimensions

