


# Maintenance unit, 3-part, Series AS5- ACT

- G 3/4
- filter porosity 5  $\mu\text{m}$
- lockable
- for padlocks
- with pressure gauge
- suitable for ATEX

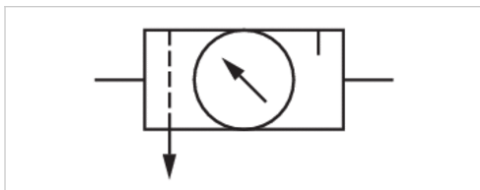

Version	3-part, Can be assembled into blocks
Parts	Pressure regulator, Filter, Lubricator
Mounting orientation	vertical
Certificates	suitable for ATEX
Working pressure min./max.	See table
Ambient temperature min./max.	-10 ... 50 °C
Medium temperature min./max.	-10 ... 50 °C
Medium	Compressed air Neutral gases
Nominal flow Qn	12300 l/min
Regulator type	Diaphragm-type pressure regulator
Regulator function	with relieving air exhaust
Adjustment range min./max.	0,5 ... 8 bar
Pressure supply	single
Filter reservoir volume	87 cm <sup>3</sup>
Filter element	exchangeable
Condensate drain	See table
Lubricator reservoir volume	181 cm <sup>3</sup>
Type of filling	Semi-automatic oil filling during operation Manual oil filling
Weight	See table

## Technical data

Part No.	Port	Flow	Working pressure min./max.
		Qn	
R412009320	G 3/4	12300 l/min	0 ... 16 bar
R412009318	G 3/4	12300 l/min	1,5 ... 16 bar
R412009319	G 3/4	12300 l/min	1,5 ... 16 bar
R412009329	G 1	12300 l/min	0 ... 16 bar
R412009327	G 1	12300 l/min	1,5 ... 16 bar
R412009328	G 1	12300 l/min	1,5 ... 16 bar

Part No.	Condensate drain	Weight
R412009320	fully automatic, closed without pressure	2,68 kg
R412009318	semi-automatic, open without pressure	2,63 kg
R412009319	fully automatic, open without pressure	2,68 kg
R412009329	fully automatic, closed without pressure	2,68 kg
R412009327	semi-automatic, open without pressure	2,63 kg
R412009328	fully automatic, open without pressure	2,68 kg

## Technical information

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

Note: Polycarbonate reservoirs are susceptible to solvents, supplementary information can be found at "Customer information".

Suitable for use in Ex zones 1, 2, 21, 22

A change in the flow direction (from air supply on the left to air supply on the right) occurs by rotating installation by 180° about the vertical axis. Please see the operating instructions for further details.


Also suitable for separation of fluid oil or water due to the design.

## Technical information

Material	
Housing	Polyamide
Front plate	Acrylonitrile butadiene styrene
Seals	Acrylonitrile butadiene rubber
Threaded bushing	Die cast zinc
Reservoir	Polycarbonate
Protective guard	Polyamide
Filter insert	Polyethylene

# Dimensions

## Dimensions

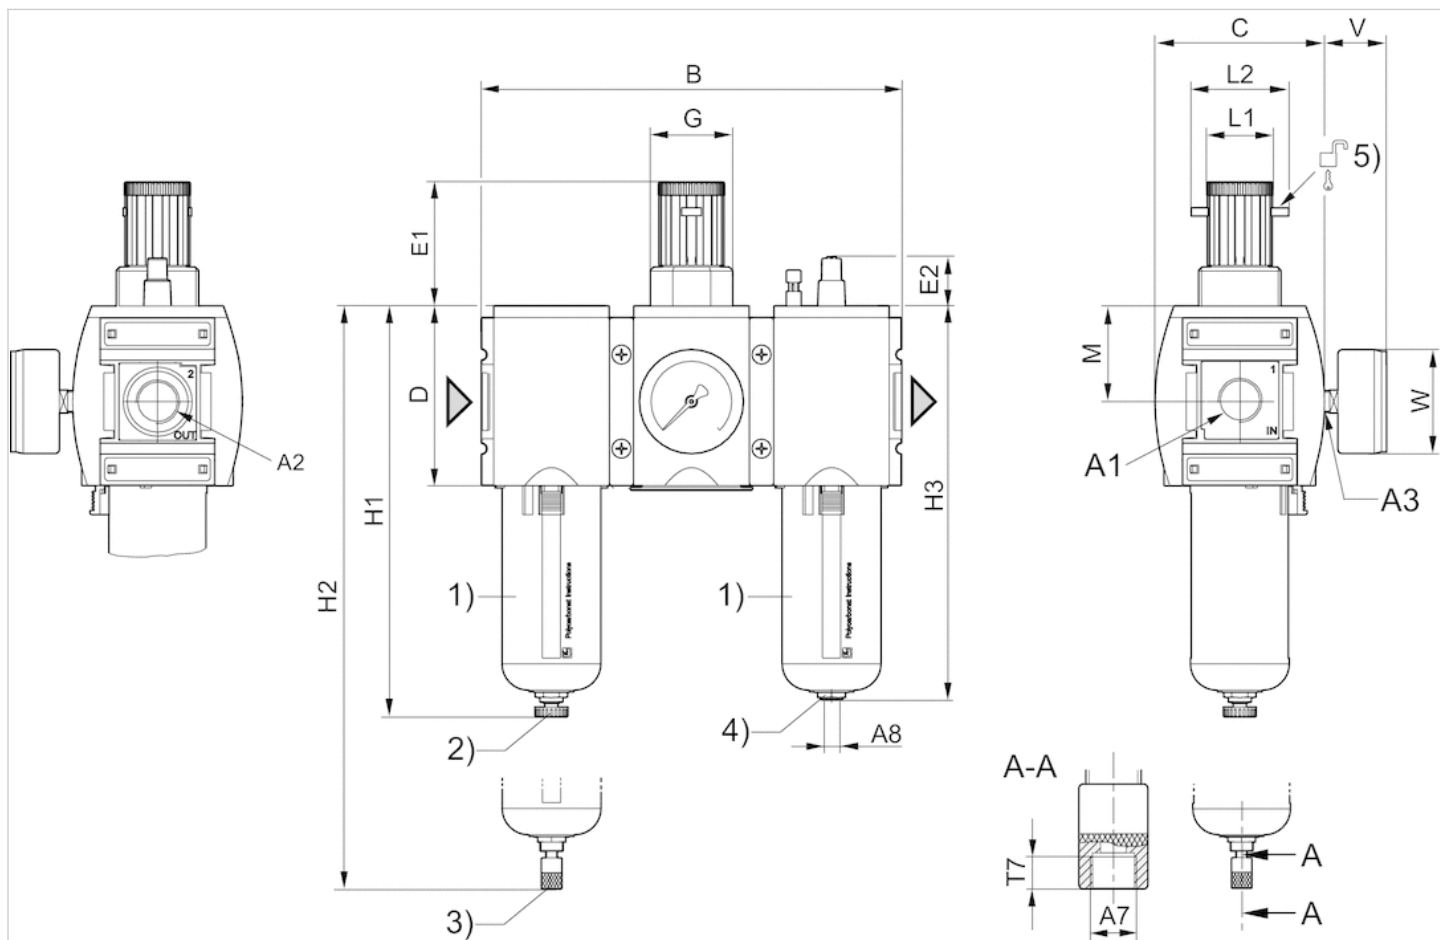


- A1 = input A2 = output A3 = pressure gauge connection
- A7 = condensate drain
- 1) Plastic reservoir and protective guard with window
- 2) Semi-automatic condensate drain
- 3) Fully automatic condensate drain
- 4) Port for semi-automatic oil filling
- 5) Mounting option for padlocks; max. shackle Ø 8

## Dimensions in mm

A1	A2	A3	A7	A8	B	C	D	E1	E2	G	H1	H2	H3	L1	L2	M	T7	V	W
G 3/4	G 3/4	G 1/4	G 1/8	G 1/8	255	103	109	75	30.5	M50x1,5	250	266	239	41	60	58	8.5	38	63
G 3/4	G 3/4	G 1/4	G 1/8	G 1/8	255	103	109	75	30.5	M50x1,5	250	266	239	41	60	58	8.5	38	63
G 3/4	G 3/4	G 1/4	G 1/8	G 1/8	255	103	109	75	30.5	M50x1,5	250	266	239	41	60	58	8.5	38	63
G 1	G 1	G 1/4	G 1/8	G 1/8	255	103	109	75	30.5	M50x1,5	250	266	239	41	60	58	8.5	38	63


# Diagrams

## Lubricator activation margin

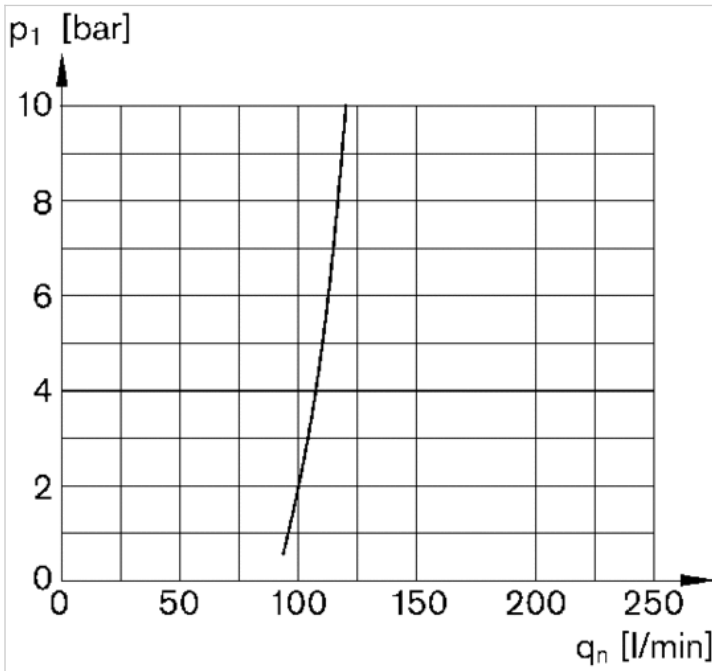

$p_1$  = working pressure  $q_n$  = nominal flow

## Flow rate characteristic (setting range $p_2$ : 0.5 - 8 bar)

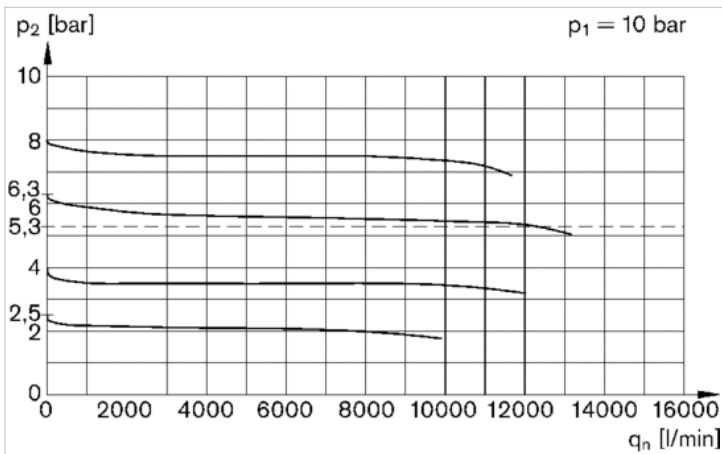

$p_1$  = Working pressure  $p_2$  = Secondary pressure  $q_n$  = Nominal flow