

# QR1-S standard series

- Angled plug-in connector
- Push-in fitting, reducing
- Ø 4 Ø 6 Ø 8
- pin bushing
- Ø 6 Ø 8 Ø 10
- QR1-S-RVR



Working pressure min./max.

-0,95 ... 10 bar

Ambient temperature min./max.

0 ... 60 °C

Weight

See table below

## Technical data

Part No.	Port G	Port D	Delivery unit	Weight
2121304060	Ø 4	Ø 6	10 piece	0,005 kg
2121306080	Ø 6	Ø 8	10 piece	0,007 kg
R412005034	Ø 8	Ø 10	10 piece	0,011 kg

Weight per piece

## Technical information

The series QR1 (plastic) and QR2 (metal) can not be combined


For further information about assembling and tolerances of adaptable tubing can be found in the "Technical information" document (available in the MediaCentre).

## Technical information

Material	
Material	nickel-plated
Housing	Polybutyleneterephthalate
Seal	Acrylonitrile butadiene rubber
Tooth lock washer	Stainless steel
Release ring	Polyoxymethylene
Release ring holder	Die cast zinc Brass, nickel-plated

## Dimensions

### Dimensions

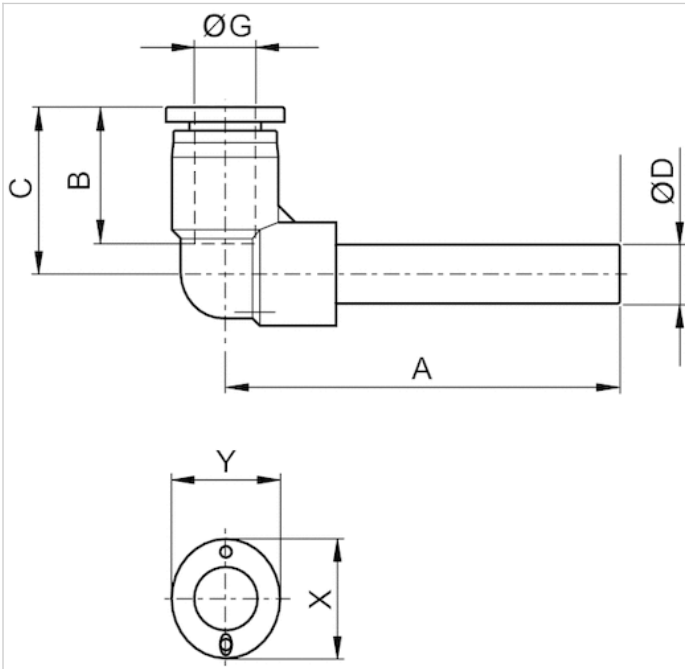

## Dimensions

Part No.	Port D	Port G	A	B	C	X	Y
2121304060	Ø 6	Ø 4	33.3	17	18.7	12	10
2121306080	Ø 8	Ø 6	41.3	18.5	21.1	14	12
R412005034	Ø 10	Ø 8	43.6	21	22.8	16	14