

QR1-S standard series

- Connection pieces, reducing
- pin bushing
- Ø5/32 Ø5/16 Ø1/4 Ø1/2
- pin bushing
- Ø1/4 Ø3/8 Ø5/16
- QR1-S-RDR



Working pressure min./max.

-0,95 ... 10 bar

Ambient temperature min./max.

0 ... 60 °C

Weight

0,005 kg

Weight per piece

Technical data

Part No.	Port G	Port D	Delivery unit
R432000057	Ø5/32	Ø1/4	10 piece
R432000059	Ø5/16	Ø3/8	10 piece
R432000061	Ø1/4	Ø5/16	10 piece
R432000055	Ø1/2	Ø3/8	10 piece

Technical information

The series QR1 (plastic) and QR2 (metal) can not be combined

These pneumatic components with NPT or inch thread dimensions are only available from our US sales organization.


For further information about assembling and tolerances of adaptable tubing can be found in the "Technical information" document (available in the MediaCentre).

Technical information

Material	
Material	nickel-plated
Housing	Polybutyleneterephthalate

Dimensions

Dimensions

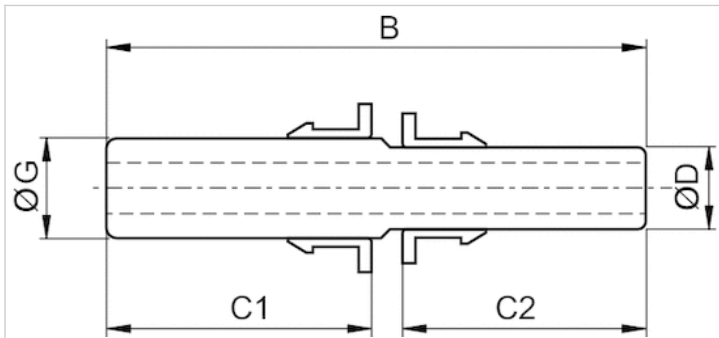

Dimensions in inches

Part No.	Port D	Port G	A	C1	C2
R432000057	Ø1/4	Ø5/32	1.42	0.67	0.63
R432000059	Ø3/8	Ø5/16	1.69	0.83	0.83
R432000061	Ø5/16	Ø1/4	1.54	0.73	0.67
R432000055	Ø3/8	Ø1/2	1.89	0.89	0.89