

Series QR2-S, standard

- Swivel banjo connection 3-fold, with hexagon socket, rotatable
- External thread
- G 1/8 G 1/4
- push-in fitting
- Ø 4 Ø 6 Ø 8 Ø 10 Ø 12
- QR2-S-RI3



Working pressure min./max.

-0,95 ... 16 bar

Ambient temperature min./max.

-20 ... 80 °C

Weight

See table below

Technical data

| Part No. | Port G | Port D | Delivery unit | Weight |
|------------|--------|--------|---------------|----------|
| 1823391920 | G 1/8 | Ø 4 | 10 piece | 0,06 kg |
| 1823391921 | G 1/8 | Ø 6 | 10 piece | 0,065 kg |
| 1823391922 | G 1/8 | Ø 8 | 10 piece | 0,066 kg |
| 1823391923 | G 1/4 | Ø 6 | 10 piece | 0,075 kg |
| 1823391924 | G 1/4 | Ø 8 | 10 piece | 0,108 kg |
| 1823391925 | G 1/4 | Ø 10 | 10 piece | 0,11 kg |
| 1823391926 | G 1/4 | Ø 12 | 10 piece | 0,117 kg |

Weight per piece

Technical information

The series QR1 (plastic) and QR2 (metal) can not be combined
Thread seal with captive O-ring

For further information about assembling and tolerances of adaptable tubing can be found in the "Technical information" document (available in the MediaCentre).


Technical information

| Material | |
|-------------------|--------------------------------|
| Housing | Brass, nickel-plated |
| Seal | Acrylonitrile butadiene rubber |
| Tooth lock washer | Stainless steel |

| Material | |
|--------------|----------------------|
| Release ring | Brass, nickel-plated |
| Thread | Brass, nickel-plated |

Dimensions

Dimensions

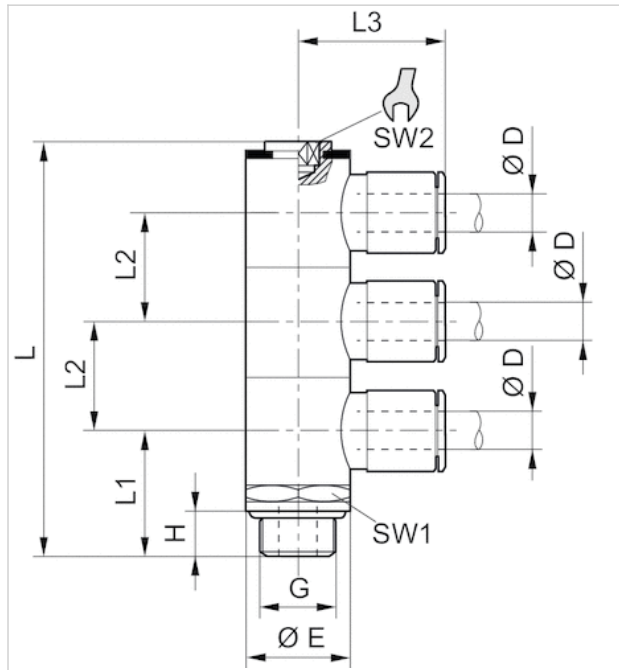

Dimensions

| Part No. | Port D | Port G | Ø E | H | L | L1 | L2 | L3 | SW1 | SW2 |
|------------|--------|--------|-----|---|----|------|----|------|-----|-----|
| 1823391920 | Ø 4 | G 1/8 | 13 | 6 | 59 | 19.1 | 15 | 21 | 14 | 3 |
| 1823391921 | Ø 6 | G 1/8 | 13 | 6 | 59 | 19.1 | 15 | 23 | 14 | 3 |
| 1823391922 | Ø 8 | G 1/8 | 13 | 6 | 59 | 19.1 | 15 | 24.5 | 14 | 3 |
| 1823391923 | Ø 6 | G 1/4 | 17 | 8 | 67 | 22.5 | 17 | 24 | 17 | 4 |
| 1823391924 | Ø 8 | G 1/4 | 17 | 8 | 67 | 22.5 | 17 | 26 | 17 | 4 |
| 1823391925 | Ø 10 | G 1/4 | 17 | 8 | 67 | 22.5 | 17 | 27 | 17 | 4 |
| 1823391926 | Ø 12 | G 1/4 | 17 | 8 | 67 | 22.5 | 17 | 28 | 17 | 4 |