

# Transition plate

- standard ISO 5599-1
- Frame size ISO 1 ▶ ISO 3 ISO 2 ▶ ISO 3
- type F
- Can be assembled into blocks
- Reversed pressure supply permissible



Standards	ISO 5599-1
Working pressure min./max.	-0,95 ... 16 bar
Ambient temperature min./max.	-15 ... 70 °C
Medium temperature min./max.	-15 ... 80 °C
Medium	Compressed air
Exhaust (3,5)	uncollected exhaust
Exhaust type	Ports separated
Mounting screw	hexagon head
Weight	See table below

## Technical data

Part No.	Frame size	Weight	Fig.
1825503166	ISO 1 ▶ ISO 3	0,825 kg	Fig. 1
1825503165	ISO 2 ▶ ISO 3	0,79 kg	Fig. 2

## Technical information

The min. control pressure must be adhered to, since otherwise faulty switching and valve failure may result!

The pressure dew point must be at least 15 °C under ambient and medium temperature and may not exceed 3 °C .

The oil content of compressed air must remain constant during the life cycle.

Use only the approved oils from AVENTICS. Further information can be found in the "Technical information" document (available in the MediaCentre).

## Technical information

Material	
Housing	Aluminum
Base plate	Aluminum
Seal	Acrylonitrile butadiene rubber

# Dimensions

Fig. 1

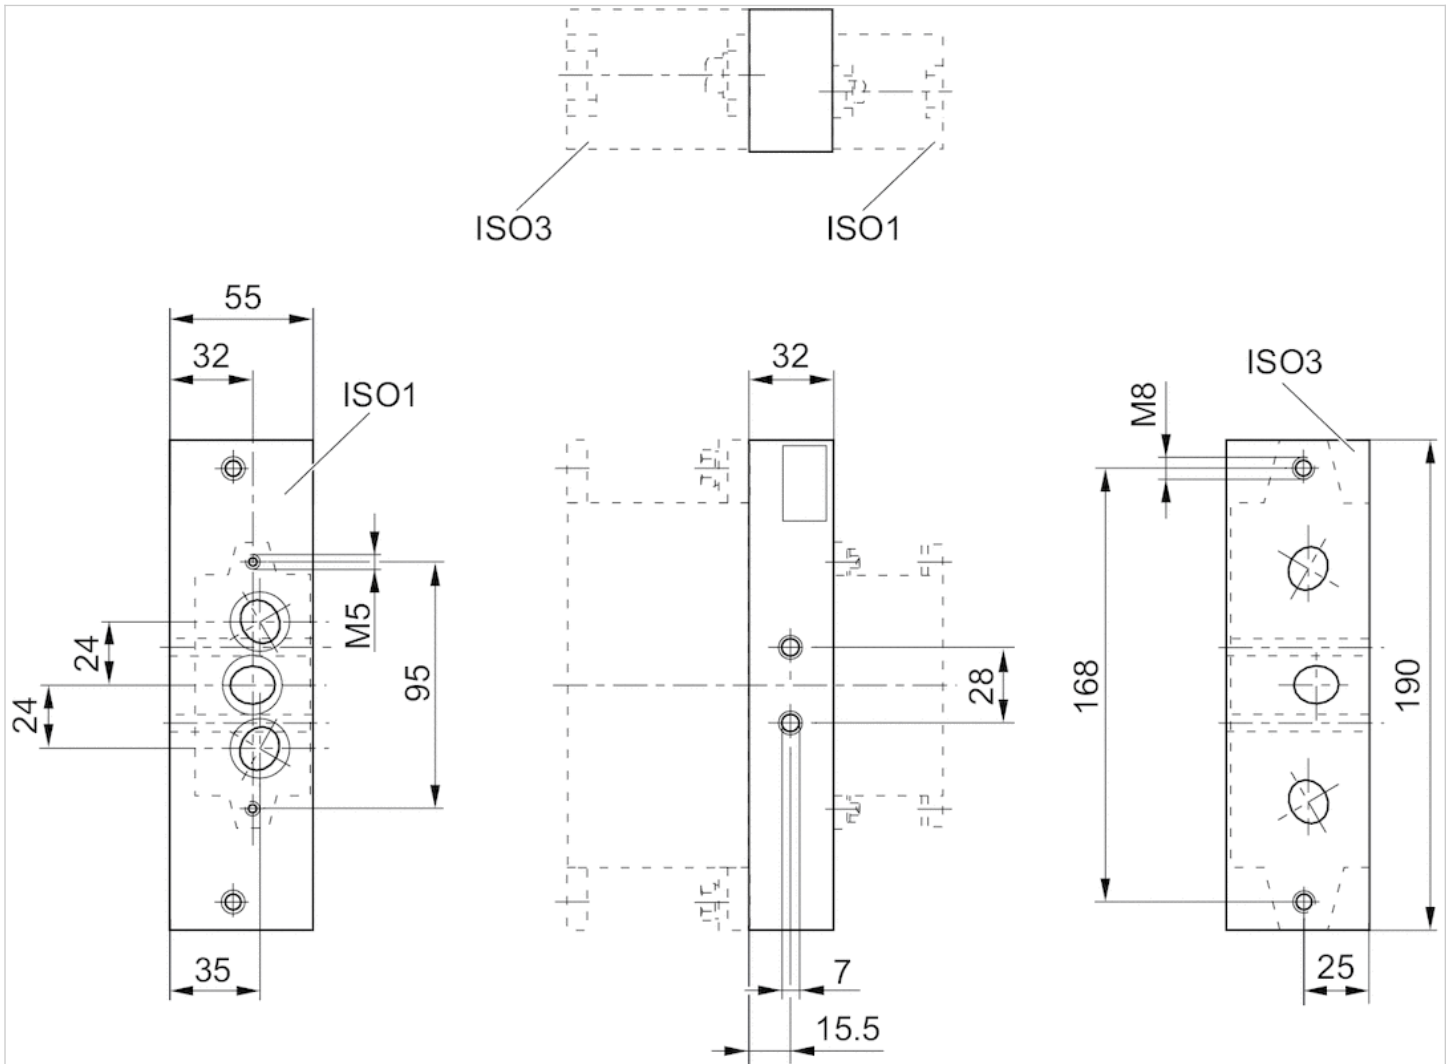


Fig. 2

